


0403.24

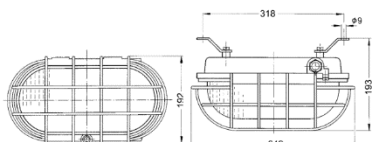

Certificate:	EXA 15 ATEX 0070X RU C-HR.AB24.B.03246
Marking of explosion protection:	II 2G EEx de IIC T2-T3
Installation:	Zone 1-2-21-22
Degree of protection:	IP64
Impact Resistance:	IK08
Temperature:	-40°C ≤ Ta ≤ +40/50/60°C: type II 2GD -20°C ≤ Ta ≤ +40°C: type I M2
Voltage:	230V AC, 110V AC, 24V AC/DC, 50Hz (60Hz on request) Housing: 0403.24/10, /11, /12: aluminium powder painted casting
Material:	0403.24/20: cast iron Diffuser: borosilicate glass protected with steel grid
Mounting:	Directly to the surface by hooks
Inputs:	2 x M25 (1 plugged)
Lamps:	Incandescent lamps, E27 lampholder, up to 100W Halogen lamps, E27 lampholder, 77W A ECO

Reference	Model	Lamp	LM	Weight
0403.24/10	II 2G Ex d e IIC T2, T3 Gb	100W max.	1500	4,3 Kg
		60W max.	800	
		77W max. / A ECO	1320	
0403.24/11,12 (red or green glass)	II 2G Ex d e IIC T3 Gb	400W max.	450	
0403.24/20	I M2 Ex d e I Mb	100W max.	1500	7,5 Kg

Reference	Accessories
0403.24 10-110	Ex d lampholder E27 set
0403.24 10-120	Gasket
0403.24 10-130	Replacement glass
0403.24 20-110	Light bulb 40W, 60W, 100W
SPU 25	Ex e cable gland M25
0403.24 20-120	II M2 Ex e I Cable gland
SPC 25	Ex e plug M25
0403.24 20-130	I M2 Ex e I Plug M25