


# PSF




IP 65

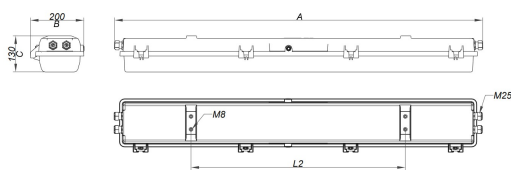


TECHNICAL SPECIFICATIONS	
<b>Certificate:</b>	EXA 13 ATEX 0014 EAC RU C-HR.AB24.B.03249
<b>Marking of explosion protection:</b>	II 2GD Ex d e mb IIC T4 Gb Ex tb IIIC T80°C Db
<b>Temperature:</b>	-20°C ≤ T <sub>a</sub> ≤ +50°C
<b>Voltage:</b>	220 - 240 V (±10%)
<b>Frequency:</b>	50 - 60 Hz
<b>Terminals:</b>	L1, L2, L3, N, PE - max. 2,5mm <sup>2</sup>
<b>Cable entries:</b>	4xM25 (2 with plugs)
<b>Material:</b>	Housing: SMC polyester plastic reinforced with glass fiber Diffuser: PC polycarbonate plastic Gasket: silicone

Ref	Description	Power	LM	Mesures (AxBxC mm)	L2 (mm)	Weight (Kg)
PSF 218	2x18W Standard	2x18W	2x1350	750x200x130	400	7,50
PSF 236	2x36W Standard	2x36W	2x3350	1370x200x130	800	10
PSF 258	2x58W Standard	2x58W	2x4600	1665x200x130		12


Reference	Accessories
PSF218 10-120 PSF236 20-120	Diffuser
SPU 25	Ex e cable gland
PSF218 10-140 PSF236 20-140	Internal reflector with lamp holder
PSF 30-120	Pipe mounting set
PSF236 20-150	Terminals 5x2,5mm <sup>2</sup>
PSF218 20-160	Socket key SW8
PSF218 10-130 PSF236 20-130	Gasket
SPC 25	Ex e plug M25
PSF 30-110	Ceiling mounting set
PSF 30-130	Wall mounting set
PSF 30-140	Ring bolt M8
PSF 30-150	Pendant mounting set




Pendant mounting set



Pipe mounting set



Wall mounting set



Ceiling mounting set