FLXE LED - Emergency

ZONE 1,21

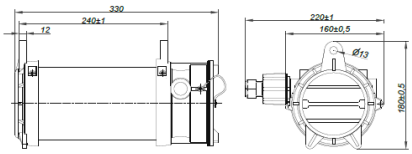

Certificate:	EXA 15 ATEX 0001X EAC RU C-HR.AB24.B.03252
Marking of explosion protection:	Ex d e IIC T6 Gb Ex tb IIIC T80°C Db
Installation:	Zone 1-2-21-22
Degree of protection:	IP66
Temperature:	-20°C ≤ Ta ≤ +50°C
Voltage:	24 / 60 / 110-127 / 220-240 VAC/DC
Power:	2 x 1,2W (LED)
Autonomy:	>3h
Material:	Housing: aluminium powder painted casting Diffuser: borosilicate glass tuve Gasket: silicon
Mounting:	Pendant, on pipe, wall, ceiling mounting. Operates in any position
Inputs:	2 x M20 (1 plugged)
Weight:	4 Kg
Reference:	**FLXE118LED**

PICTOGRAM:

2	
3	
4	
5	
6	
7	
8	

Reference	Accesories
FLXE10-120	**Cover gasket**
FLXE10-130	**Base plate**
FLXE10-140	**Protective grid**
FLXE20-150	**External reflector**
FLXE20-170	**Wall/ceiling mounting set**
FLXE20-180	**Pipe mounting set**