


**LL-400
SERIES**

LL-440 LED Handlamp ATEX II 2 GD



- Ideal for inspection
- Compact and robust design
- With cable and plug
- Voltage 110-254 VAC

LL-420-440-460LED
180° light beam

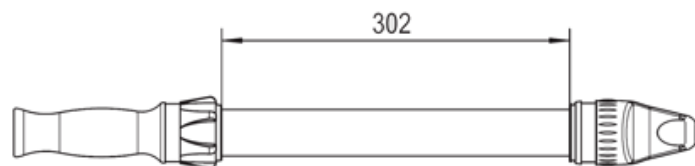

Reference	LL-440	LL-440LED	LL-460LED
Description	ATEX LED handlamp		
Certification	ATEX II 2GD Ex d IIC T4 IP67		
Zones	1-2-21-22		
Certificate	PTB07ATEX1009 IECEx PTB 07.0018		
Material	Polycarbonate, handle elastomer (EPDM)		
Light beam	Diffuse, white inspection light		
Light source	High Power LED		
Light source life	Up to 25000 h		
Power	≈15w		
Light output	600lm	670lm	
Voltage	24-48V AC +/-10%	110V AC +/-10%	254V AC +/-10%
Plug	24V	110V	230V
Cable	10, 1.5mm ² HOFR with ATX plug		
Weight	1.2 kg (without cable)		

* All products are supplied with LEDs and ATX plug as standard